

Dayscreen 1%

External Screens & Awnings



Application: • External Screens and Awnings

Characteristics: • Width: 3200mm

Technical:

- Composition: 20% Polyester | 80% PVC
- Basketweave:
- Openness Factor: 1%
- Nominal Thickness ISO 2286-3: 0.93 mm +/- 5%
- Nominal Weight ISO 2286-2: 690 gsm +/- 5%
- Light Fastness: 6 (Bluescale) Tested to EN ISO 105
- Formaldehyde Free | Lead Free | Phthalate Free | VOC free
- Yarn Count ISO 7211/2: Warp 39 +/--% per 25.4mm | Weft 34 +/- % per 25.4mm
- Breaking Strength ISO 1421 Warp: 245 daN/5cm | Weft: 210 daN/5cm
- Tear Strength ISO 4674 Warp: 12 daN | Weft 10 daN
- Colour Fastness to Light ISO 105: B04: 8
- Mould Resistance ISO 846: A
- Printable


Protection:

- Fire Classification: Tested to NFPA 701 – 2010 (FR-USA) | DIN 4102 – 1 (B1 – DE)
Tested to AS1530 Part II & III
- Greenguard and Greenguard Gold Accredited
- Oeko-Tex Certified
- UV Resistant ISO 105:B04
- Manufactured in accordance with: Management Quality System ISO 9001
- Manufactured in accordance with: Environmental Management System ISO 14001


Care: • Surface dust may be removed with warm water and detergent. Never use abrasive products or solvent /industrial based cleaners.

Warranty: • 10 Years

Colour Range *

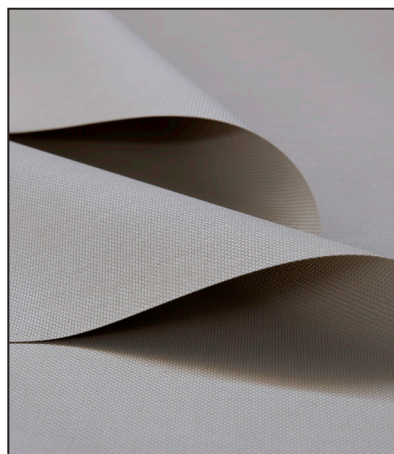

Dayscreen 1%

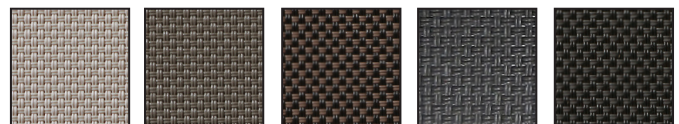


haze

woodland

earth

totem

ironstone



night